

CARBIDE, 3 FLUTE 45° HELIX LONG LENGTH

● **VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE LANG**
● **Fraise carbure, 3 dents, hélice 45°, longue**
● **3 TAGLIENTI, ELICA 45°, SERIE LUNGA**

- ▶ Excellent cutting qualities on aluminum and copper

▶ Increased tool life and higher cutting accuracy


▶ Mirror surface - Excellent surface finish

▶ Superior chip evacuation
- ▶ **Ausgezeichnete Schneideigenschaften in Aluminium, Kupfer**

▶ **Verbesserte Standzeiten und höhere Fräsgenauigkeit.**

▶ **Spiegel-Oberfläche - Hervorragendes Oberflächenfinishing.**

▶ **Überlegene Spanabfuhr**

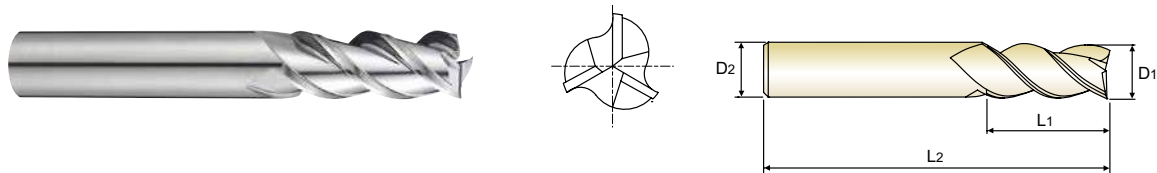

CARBIDE

3

45°

PLAIN



P.497

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E49030	3.0	6	12	57
E5E49040	4.0	6	15	57
E5E49050	5.0	6	20	57
E5E49060	6.0	6	20	65
E5E49080	8.0	8	22	65
E5E49100	10.0	10	25	70
E5E49120	12.0	12	25	75
E5E49160	16.0	16	35	90
E5E49200	20.0	20	40	100

▶ TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.015	h5

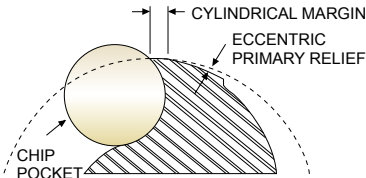

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend																						
ISO	N										S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	○																	

E5E49, E5E50 SERIES


Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

3 FLUTE - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)									
						3.0	4.0	5.0	6.0	8.0	9.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	0.5D	Vc	65	90	110	130	140	160	175	210	210	175
					fz	0.035	0.045	0.050	0.060	0.088	0.097	0.106	0.131	0.158	0.200
					RPM	6897	7162	7003	6897	5570	5659	5570	5570	4178	2785
	23~24	Aluminum-cast, alloyed	1.0D	0.5D	FEED	724	967	1050	1241	1471	1647	1771	2189	1980	1671
					Vc	42	59	72	85	91	104	114	137	137	114
					fz	0.035	0.045	0.050	0.060	0.088	0.097	0.106	0.131	0.158	0.200
					RPM	4483	4655	4552	4483	3621	3678	3621	3621	2716	1810
					FEED	471	628	683	807	956	1070	1151	1423	1287	1086

3 FLUTE - SIDE CUTTING


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)									
						3.0	4.0	5.0	6.0	8.0	9.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	0.15D	1.5D ~ 2.5D	Vc	65	90	110	130	140	160	175	210	210	175
					fz	0.045	0.055	0.065	0.075	0.113	0.122	0.131	0.163	0.200	0.238
					RPM	6897	7162	7003	6897	5570	5659	5570	5570	4178	2785
	23~24	Aluminum-cast, alloyed	0.15D	1.5D ~ 2.5D	FEED	931	1182	1366	1552	1888	2071	2189	2724	2507	1989
					Vc	42	59	72	85	91	104	114	137	137	114
					fz	0.045	0.055	0.065	0.075	0.113	0.122	0.131	0.163	0.200	0.238
					RPM	4483	4655	4552	4483	3621	3678	3621	3621	2716	1810
					FEED	605	768	888	1009	1227	1346	1423	1771	1629	1293


E5E39, E5E40, E5742, E5711 SERIES
3 FLUTE ROUGHING - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	1.0D	1.5D	Vc	198	201	204	241	241	242
					fz	0.168	0.167	0.179	0.167	0.167	0.165
					RPM	10504	7998	6494	6393	4795	3852
	23~24	Aluminum-cast, alloyed	1.0D	1.5D	FEED	5294	4007	3487	3203	2402	1907
					Vc	129	131	133	157	157	157
					fz	0.168	0.167	0.179	0.167	0.167	0.165
					RPM	6828	5198	4221	4155	3116	2504
					FEED	3441	2604	2267	2082	1561	1239

3 FLUTE ROUGHING - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
N	21~22	Aluminum-wrought alloy	0.5D	1.5D	Vc	254	264	267	320	322	320
					fz	0.168	0.168	0.169	0.165	0.167	0.163
					RPM	13475	10504	8499	8488	6406	5093
	23~24	Aluminum-cast, alloyed	0.5D	1.5D	FEED	6791	5294	4309	4202	3209	2490
					Vc	165	172	174	208	209	208
					fz	0.168	0.168	0.169	0.165	0.167	0.163
					RPM	8759	6828	5524	5517	4164	3310
					FEED	4414	3441	2801	2731	2086	1619

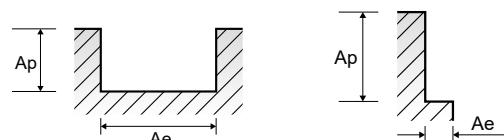



MILLING TOOLS

SOLID CARBIDE

ALU POWER END MILLS

Aluminium Alloys and Silent Cutting



Please visit
globalyg1.com/mat
for material search

◎: Excellent ○: Good

Recommended cutting conditions : P 494

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125				
	2		About 0.45% C	Annealed	190	13			
	3		About 0.45% C	Quenched & Tempered	250	25			
	4		About 0.75% C	Annealed	270	28			
	5		About 0.75% C	Quenched & Tempered	300	32			
	6	Low alloy steel		Annealed	180	10			
	7			Quenched & Tempered	275	29			
	8			Quenched & Tempered	300	32			
	9			Quenched & Tempered	350	38			
	10	High alloyed steel, and tool steel		Annealed	200	15			
11			Quenched & Tempered	325	35				
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15			
	13		Martensitic	Quenched & Tempered	240	23			
	14		Austenitic		180	10			
K	15	Grey cast iron	Pearlitic / ferritic		180	10			
	16		Pearlitic (Martensitic)		260	26			
	17	Nodular cast iron	Ferritic		160	3			
	18		Pearlitic		250	25			
	19	Malleable cast iron	Ferritic		130				
	20		Pearlitic		230	21			
N	21	Aluminum-wrought alloy	Not Curable		60		☉	☉	☉
	22		Curable Hardened		100		☉	☉	☉
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		☉	☉	☉
	24		≤ 12% Si, Curable Hardened		90		☉	☉	☉
	25		> 12% Si, Not Curable		130		○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		○	○	○
	27		CuZn, CuSnZn (Brass)		90		○	○	○
	28		CuSn, lead-free copper and electrolytic copper		100		○	○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33			Annealed	250	25			
	34		Ni or Co Based	Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium		400 Rm				
	37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			



CBN
END MILLS

i-Xmill
END MILLS

i-SMART MODULAR TYPE END MILLS

X5070
END MILLS

4G MILL END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-POWER END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTER

TECHNICAL DATA