



Vap	<b>TB814</b> SERIES
Bright	<b>TC814</b> SERIES
TiN	<b>TD814</b> SERIES


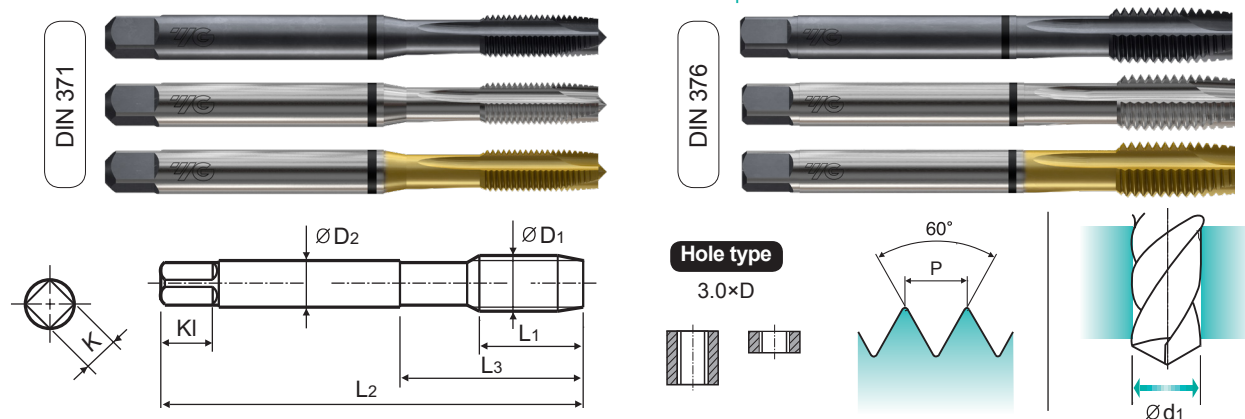
## ISO Metric coarse threads DIN 13



- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13

► For using multi-purpose and correct thread profiles & long tool life due to special tap geometry. YG-1 company has a patent.

► Für vielfältigen Einsatz, genaue Gewindeprofile und lange Standzeit dank einer besonderen Schneidengeometrie. Von YG-1 patentiert.



Machine taps  
Maschinengewindebohrer

Recommended Cutting Page : P.116

Unit : mm

SIZE	Pitch	EDP No.			Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Vap	Bright	TiN	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TB814136	TC814136	TD814136	8	45	13	2.8	2.1	5	3	1.6
M2.2 × 0.45		TB814156	TC814156	TD814156	8	45	13	2.8	2.1	5	3	1.75
M2.3 × 0.4		TB814196	TC814196	TD814196	8	45	13	2.8	2.1	5	3	1.9
M2.5 × 0.45		TB814176	TC814176	TD814176	9	50	15	2.8	2.1	5	3	2.05
M2.6 × 0.45		TB814496	TC814496	TD814496	9	50	15	2.8	2.1	5	3	2.1
M3 × 0.5		TB814206	TC814206	TD814206	11	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TB814226	TC814226	TD814226	12	56	20	4	3	6	3	2.9
M4 × 0.7		TB814246	TC814246	TD814246	13	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TB814266	TC814266	TD814266	14	70	25	6	4.9	8	3	3.7
M5 × 0.8		TB814286	TC814286	TD814286	15	70	25	6	4.9	8	3	4.2
M6 × 1		TB814316	TC814316	TD814316	17	80	30	6	4.9	8	3	5
M7 × 1		TB814346	TC814346	TD814346	17	80	30	7	5.5	8	3	6
M8 × 1.25		TB814366	TC814366	TD814366	20	90	35	8	6.2	9	3	6.8
M9 × 1.25		TB814396	TC814396	TD814396	20	90	35	9	7	10	3	7.8
M10 × 1.5		TB814426	TC814426	TD814426	22	100	39	10	8	11	3	8.5
M11 × 1.5		TB814466	TC814466	TD814466	22	100	40	8	6.2	9	3	9.5
M12 × 1.75		TB814506	TC814506	TD814506	24	110	44	9	7	10	3	10.2
M14 × 2		TB814546	TC814546	TD814546	26	110	44	11	9	12	3	12
M16 × 2		TB814606	TC814606	TD814606	27	110	44	12	9	12	3	14
M18 × 2.5		TB814656	TC814656	TD814656	30	125	50	14	11	14	4	15.5
M20 × 2.5		TB814706	TC814706	TD814706	32	140	54	16	12	15	4	17.5
M22 × 2.5		TB814746	TC814746	TD814746	32	140	54	18	14.5	17	4	19.5
M24 × 3		TB814786	TC814786	TD814786	34	160	60	18	14.5	17	4	21
M27 × 3		TB814866	TC814866	TD814866	36	160	60	20	16	19	4	24
M30 × 3.5		TB814946	TC814946	TD814946	40	180	70	22	18	21	4	26.5

► DIN 371(M2~M10) and DIN 376(M11~M30)

\* The other coating (TiCN or TiAlN) is available on your request.

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○		◎	◎	◎	◎	◎	◎	◎			
ISO	N									S							H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended			◎			◎	◎	◎													



RECOMMENDED CUTTING CONDITIONS  
EMPFOHLENE SCHNEIDKONDITIONEN

THREAD MILLS					TB744 TB754 TQ744 TQ754	TC814 TC854 TC834 TC874	TD814 TD854 TD834 TD874	TB814 TB854 TB834 TB874	TCJ05 TCJ09 TCJ01 TCJ02	TDJ05 TDJ09 TDJ01 TDJ02	TBJ05	TCJ06	
SYNCHRO TAPS	ISO	VDI 3323	Material Description	HB	HRC	Vc (m/min)							
COMBO TAPS	P	1	Non-alloy steel	125			15-20	20-25	15-20	15-20	20-25	15-20	15-20
YG TAP GENERAL		2		190	13	15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20
		3		250	25		12-18	18-24	12-18	12-18	18-24	12-18	12-18
		4		270	28	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15
YG TAP STEEL		5		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10
		6	Low alloy steel	180	10	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15
YG TAP HARDENED		7		275	29	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15
		8		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10
		9		350	38		3-5	5-7	3-5	3-5	5-7	3-5	3-5
YG TAP INOX		10		High alloyed steel, and tool steel	200	15		3-5	5-7	3-5	3-5	5-7	3-5
		11	325		35								
YG TAP CAST IRON	M	12	Stainless steel	200	15	7-10	7-10	10-15	7-10	7-10	10-15	7-10	7-10
		13		240	23	5-8	5-8	8-11	5-8	5-8	8-11	5-8	5-8
		14		180	10	4-6	4-6	6-8	4-6	4-6	6-8	4-6	4-6
YG TAP ALU	K	15	Grey cast iron	180	10		10-15	15-20	10-15	10-15	15-20	10-15	10-15
		16		260	26		5-8	8-11	5-8	5-8	8-11	5-8	5-8
YG TAP Ti Ni		17	Nodular cast iron	160	3		10-15	15-20	10-15	10-15	15-20	10-15	10-15
		18		250	25		5-8	8-11	5-8	5-8	8-11	5-8	5-8
YG TAP FORMING		19	Malleable cast iron	130									
		20		230	21								
NUT TAPS	N	21	Aluminum-wrought alloy	60									
		22		100									
STI TAPS		23	Aluminum-cast, alloyed	75		15-20	20-25	15-20	15-20	20-25	15-20	15-20	
		24		90									
25		130											
PIPE TAPS		26	Copper and Copper Alloys (Bronze / Brass)	110		25-35	35-40	25-35	25-35	35-40	25-35	25-35	
		27		90		8-12	12-17	8-12	8-12	12-17	8-12	8-12	
		28		100	15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20	
TECHNICAL DATA		29	Non Metallic Materials										
		30											
	S	31	Heat Resistant Super Alloys	200	15								
		32		280	30								
		33		250	25								
		34		350	38								
		35		320	34								
		36	Titanium Alloys	400 Rm									
		37		1050 Rm									
	H	38	Hardened steel	550	55								
		39		630	60								
		40	Chilled Cast Iron	400	42								
		41	Hardened Cast Iron	550	55								

# SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

## STEAM TEMPERED - Vap

Steam Tempered is a Fe<sub>3</sub>O<sub>4</sub>-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

## NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

## TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

## TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

## TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds  $\geq 600\text{m/min}$ . TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

## Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



HSS-E & HSS-PM COMBO TAPS













































































For Multi Purpose Tapping  
YG-1's Patent



Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.114

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC						
P	1	Non-alloy steel	About 0.15% C	Annealed	125							
	2		About 0.45% C	Annealed	190	13						
	3		About 0.45% C	Quenched & Tempered	250	25						
	4		About 0.75% C	Annealed	270	28						
	5		About 0.75% C	Quenched & Tempered	300	32						
	6	Low alloy steel		Annealed	180	10						
	7			Quenched & Tempered	275	29						
	8			Quenched & Tempered	300	32						
	9			Quenched & Tempered	350	38						
	10	High alloyed steel, and tool steel		Annealed	200	15						
	11			Quenched & Tempered	325	35						
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15						
	13		Martensitic	Quenched & Tempered	240	23						
	14		Austenitic		180	10						
K	15	Grey cast iron	Pearlitic / ferritic		180	10						
	16		Pearlitic (Martensitic)		260	26						
	17	Nodular cast iron	Ferritic		160	3						
	18		Pearlitic		250	25						
	19	Malleable cast iron	Ferritic		130							
	20		Pearlitic		230	21						
N	21	Aluminum-wrought alloy	Not Curable		60							
	22		Curable      Hardened		100							
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75							
	24		≤ 12% Si, Curable      Hardened		90							
	25		> 12% Si, Not Curable		130							
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110							
	27		CuZn, CuSnZn (Brass)		90							
	28		CuSn, lead-free copper and electrolytic copper		100							
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic									
	30		Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15						
	32			Cured	280	30						
	33			Annealed	250	25						
	34		Ni or Co Based	Cured	350	38						
	35			Cast	320	34						
	36	Titanium Alloys	Pure Titanium		400 Rm							
	37		Alpha + Beta Alloys	Hardened	1050 Rm							
H	38	Hardened steel		Hardened	550	55						
	39			Hardened	630	60						
	40	Chilled Cast Iron		Cast	400	42						
	41	Hardened Cast Iron		Hardened	550	55						